

# VD

## 特点 Features

- 保证105°C 3000~5000小时。Endurance 3000~5000h at 105°C.
- 额定电压范围：6.3~100V。Rated Voltage Range:6.3~100V.
- 低阻抗、长寿命品。Low ESR ,Long life Type.
- 满足RoHS。RoHS Compliant.




## 主要技术性能 Specifications


项目 Items	特性 Performance Characteristics																															
类别温度范围 Category Temperature Range	-55~+105°C																															
额定电压范围 Rated Voltage(U <sub>R</sub> )	6.3~100V																															
标称电容容量范围 Nominal Capacitance Range(C <sub>R</sub> )	4.7~8200µF	120Hz, +20°C																														
标称电容容量允许偏差 Allowed Capacitance Tolerance(C <sub>r</sub> )	±20%(M)	120Hz, +20°C																														
漏电流 Leakage Current(I <sub>L</sub> )	≤0.01C <sub>R</sub> U <sub>R</sub> 或者3µA 取较大值 ( Whichever is greater )																															
损耗角正切值 Tangent of loss angle(Tanδ)	<table border="1"> <tr> <td>U<sub>R</sub>(V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Tanδ</td> <td>0.26</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.12</td> <td>0.10</td> <td>0.08</td> <td>0.07</td> </tr> </table>	U <sub>R</sub> (V)	6.3	10	16	25	35	50	63	80	100	Tanδ	0.26	0.20	0.16	0.14	0.12	0.12	0.10	0.08	0.07	Max. 120Hz, +20°C										
U <sub>R</sub> (V)	6.3	10	16	25	35	50	63	80	100																							
Tanδ	0.26	0.20	0.16	0.14	0.12	0.12	0.10	0.08	0.07																							
低温特性 Characteristics at Low Temperature	<table border="1"> <tr> <td>U<sub>R</sub> (V)</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> <td>63</td> <td>80</td> <td>100</td> </tr> <tr> <td>Z<sub>-25°C</sub> / Z<sub>+20°C</sub></td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z<sub>-55°C</sub> / Z<sub>+20°C</sub></td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>	U <sub>R</sub> (V)	6.3	10	16	25	35	50	63	80	100	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	4	3	2	2	2	2	2	2	2	Z <sub>-55°C</sub> / Z <sub>+20°C</sub>	8	5	4	3	3	3	3	3	3	Max. 120Hz
U <sub>R</sub> (V)	6.3	10	16	25	35	50	63	80	100																							
Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	4	3	2	2	2	2	2	2	2																							
Z <sub>-55°C</sub> / Z <sub>+20°C</sub>	8	5	4	3	3	3	3	3	3																							
耐久性 Load Life	+105°C施加额定电压5000小时后 (ΦD=4, 5和6.3为3000小时) , 恢复16小时后: After applying rated voltage for 5000 hours(3000 hours for φD = 4, 5 and 6.3) at 105°C and then recovery 16 hours:																															
	电容量变化率 Capacitance change	±30%初始值以内 Within ±30% of initial value																														
	损耗角正切值 Tanδ	≤ 300%初始规定值 Not more than 300% of specified value																														
	漏电流 Leakage current	≤ 初始规定值 Not more than specified value																														
高温贮存 Shelf Life	+105°C,1000小时贮存后,恢复16小时后: After storage for 1000 hours at +105°C and then recovery 16 hours:																															
	电容量变化率 Capacitance change	±30%初始值以内 Within ±30% of initial value																														
	损耗角正切值 Tanδ	≤ 300%初始规定值 Not more than 300% of specified value																														
	漏电流 Leakage current	≤ 初始规定值 Not more than specified value																														
耐焊接热 Resistance to Soldering Heat	在250°C的条件下,电容器在热板上保持30秒,然后从热板上取出电容器,让其在室温下恢复,电容器应满足以下要求: The capacitors shall be kept on the hot plate maintained at 250°C for 30 seconds. After removing from the hot plate and restored at room temperature, they meet the following requirement.																															
	电容量变化率 Capacitance change	±10%初始值以内 Within ±10% of initial value																														
	损耗角正切值 Tanδ	≤初始规定值 Not more than specified value																														
	漏电流 Leakage current	≤ 初始规定值 Not more than specified value																														

尺寸图 Dimensional drawings

Fig.1

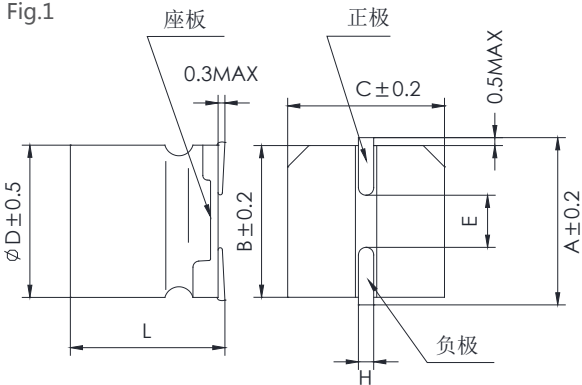

Marking  
 $\varnothing D=4 \sim 5 \text{ mm}$



$\varnothing D=6.3 \sim 10.2 \text{ mm}$






Fig.2

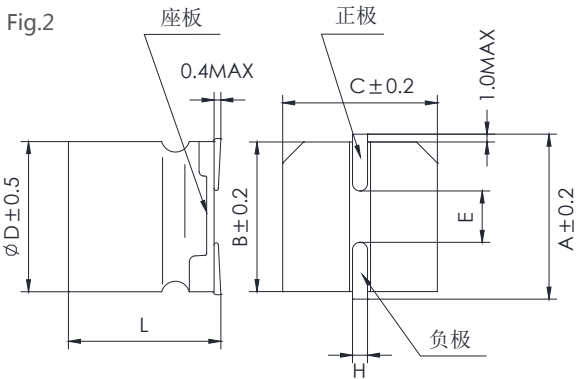

$\varnothing D=12.5 \sim 18 \text{ mm}$



尺寸表 Size table

单位 Unit: mm

$\varnothing D$	L	A	B	C	$E \pm 0.2$	H	Fig.No.
4	$5.8 \pm 0.3$	5.0	4.3	4.3	1.0	0.5 ~ 0.8	1
5	$5.8 \pm 0.3$	6.0	5.3	5.3	1.3		
6.3	$5.8 \pm 0.3$	7.3	6.6	6.6	2.2		
6.3	$7.7 \pm 0.3$	7.3	6.6	6.6	2.2		
8	$6.5 \pm 0.3$	8.9	8.3	8.3	2.3	0.8 ~ 1.1	1
8	$10/10.5 \pm 0.5$	9.0	8.3	8.3	3.1		
10	$10/10.5 \pm 0.5$	11.0	10.3	10.3	4.5		
10	$12.5 \pm 0.5$	11.0	10.3	10.3	4.5		
12.5	$13.5 \pm 0.5$	13.6	13	13	4.5	1.1 ~ 1.4	2
12.5	$16 \pm 0.5$	13.6	13	13	4.5		
16	$16.5 \pm 0.5$	18.0	17	17	6.4		
16	$21.5 \pm 0.5$	18.0	17	17	6.4		
18	$16.5 \pm 0.5$	20.0	19	19	6.4		
18	$21.5 \pm 0.5$	20.0	19	19	6.4		

规格特性表  
Table of specifications and characteristics

U <sub>R</sub> (V) C <sub>R</sub> (μF)	6.3V			10V			16V			25V			35V		
	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω
4.7													4*5.8	90	1.35
10							4*5.8	90	1.35	4*5.8	90	1.35	5*5.8	160	0.70
22	4*5.8	90	1.35	4*5.8	90	1.35	5*5.8	160	0.70	5*5.8	160	0.70	6.3*5.8	240	0.36
47	5*5.8	160	0.70	5*5.8	160	0.70	5*5.8	160	0.70	6.3*5.8	240	0.36	6.3*7.7	300	0.30
100	6.3*5.8	240	0.36	6.3*5.8	240	0.36	6.3*5.8	240	0.36	6.3*7.7	300	0.30	8*10.5	650	0.16
220	6.3*5.8	240	0.36	6.3*7.7	300	0.30	6.3*7.7	300	0.30	8*10.5	650	0.16	10*10.5	850	0.09
330	6.3*7.7	300	0.30	8*10.5	650	0.16	8*10.5	650	0.16	8*10.5	650	0.16	10*10.5	850	0.09
470	8*10.5	650	0.16	8*10.5	650	0.16	10*10.5	850	0.09	10*10.5	850	0.09	10*12.5	1090	0.065
680	8*10.5	650	0.16	10*10.5	850	0.09	10*10.5	850	0.09	12.5*13.5	1190	0.06	12.5*13.5	1190	0.06
1000	10*10.5	850	0.09	10*10.5	850	0.09	12.5*13.5	1190	0.06	12.5*16	1260	0.056	16*16.5	1800	0.038
1500	10*10.5	850	0.09	12.5*13.5	1190	0.06	12.5*16	1260	0.056	16*16.5	1800	0.038	18*16.5	1980	0.035
2200	12.5*13.5	1190	0.06	12.5*16	1260	0.056	16*16.5	1800	0.038	16*21.5	1650	0.038	18*21.5	2100	0.033
3300	12.5*16	1260	0.056	16*16.5	1800	0.038	16*16.5	1800	0.038	18*16.5	1980	0.035			
4700	16*16.5	1800	0.038	16*16.5	1800	0.038	18*16.5	1980	0.035						
6800	18*16.5	1980	0.035	18*16.5	1980	0.035									
8200	18*21.5	2100	0.033	18*21.5	2100	0.033									

U <sub>R</sub> (V) C <sub>R</sub> (μF)	50V			63V			80V			100V		
	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω	ΦDxL mm*mm	I <sub>ACR</sub> 100KHz 105°C mA	ESR <sub>max</sub> 100KHz 25°C Ω
4.7	4*5.8	60	3.0	5*5.8	70	1.9						
10	5*5.8	85	1.5	6.3*5.8	80	1.5	6.3*7.7	60	2.4	6.3*7.7	60	2.4
22	6.3*5.8	165	0.88	6.3*7.7	120	1.2	8*10.5	130	1.3	8*10.5	130	1.3
33	6.3*7.7	195	0.68	8*10.5	250	0.65	10*10.5	200	0.7	10*10.5	200	0.7
47	8*10.5	350	0.34	8*10.5	250	0.65	10*10.5	200	0.7	12.5*13.5	460	0.32
100	10*10.5	670	0.18	10*10.5	400	0.35	12.5*13.5	460	0.32	12.5*13.5	460	0.32
220	10*12.5	730	0.15	12.5*13.5	720	0.15	12.5*16	570	0.25	16*16.5	650	0.17
330	12.5*13.5	650	0.12	16*16.5	900	0.082	16*16.5	650	0.17	16*21.5	900	0.15
470	12.5*16	870	0.1	16*16.5	900	0.082	16*21.5	900	0.15	18*21.5	950	0.15
680	16*16.5	1000	0.073	16*21.5	1150	0.080	18*21.5	950	0.15			
1000	18*16.5	1500	0.066	18*21.5	1250	0.060						
1500	18*21.5	1620	0.050									

额定纹波电流频率修正系数  
Frequency correction factor for ripple current

Frequency ( Hz )	50	120	300	1K	≥10K
Coefficient ( kf )	0.35	0.50	0.64	0.83	1.00